alfresia



Alfresia Roma 3 Seater Swing Seat

PLEASE READ AND KEEP THESE INSTRUCTIONS

SAP Code: JT04655201 /

JT04656901


For further assistance, other products and more, join us at:

Website: www.alfresia.co.uk Instagram: @alfresiauk Facebook: www.facebook.com/alfresia Thank you for choosing our Alfresia 3 Seater Roma Swing Seat. Please read this user manual carefully and keep it for future reference. If you need any assistance, please contact our customer service team on the details provided on the back page of this

Components Supplied

Please check the list of supplied items which correspond to the numbered diagrams below:

2 x A	● ► M6x55
4 x B	● M8x120
2 x C	● ► M6x60
2 x D	● ← M6x80
2 x +	● ► M6x60
4 x §	♦ ► M6x50
4 x E	€ M8
10 x F	€ M6
26 x G	○ D6
8 x H	O D8
4 x I	
4 x J	
2 x K	

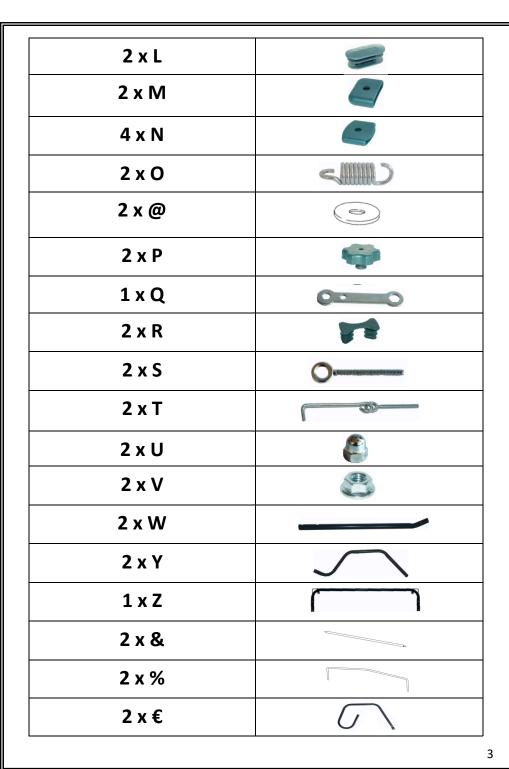

1 x Ω	
1 x \$	
1 x #	
2 x Δ	
1 x []	

Please ensure that you have received all of the above items and check for any damages before use. If you find any damages, please contact our customer services department.

Assembly Instructions

IMPORTANT: DO NOT USE EXCESSIVE FORCE DURING ANY PART OF SET UP

Assembly Notes


- Assemble on a soft, clean surface to avoid damaging or marking the pieces
- Do not use if any parts are missing, damaged or worn
- Do not use if any of the fixings or fittings are not secure
- Always place the product on a flat, level surface before use
- Always use the product for its intended purpose. Misuse of the product could cause injury

Care & Maintenance


Periodically check that all of the screws and fixings are secure and tighten if necessary

MAXIMUM USER CAPACITY: 250KG


1) Attach the front (Y) and back legs (W) of the swing seat to the top canopy frame (Z) using fixings (B), (E) & (H). Then insert the two plastic fittings (J) into the top of each leg stand (Y) & (W). Insert plastic fitting (R) into the bottom groove of the canopy frame (Z). Repeat this process for both sides of the swing seat.

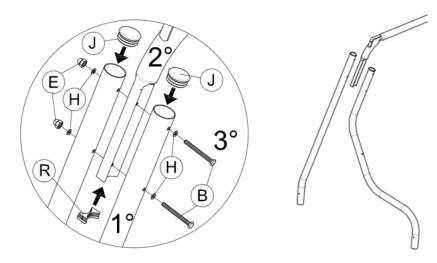


2) Place each of the plastic fittings (N) on each end of the bottom bars (Δ). Use fixtures (D) & (G) to attach bottom bars (Δ) and ([]) to the legs of the frame. Insert piece (I) into the feet of each leg. Use fixings (F), (G) & (+) to attach the remaining bottom bar.

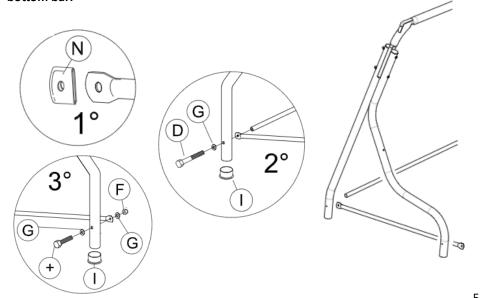


3) Insert both of the seat hooks (T) into both sides of the assembled frame using fixtures (U) & (G) as shown in the diagram below.




4) Insert 2 x screw (C) into both sides of the top frame and attach one piece of the canopy plastics (K) to each of the screws (C) on the end of the frame.

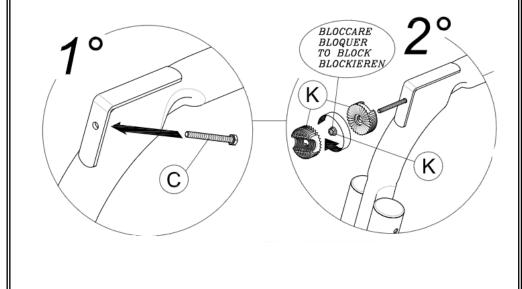


5) Insert both of the straight canopy bars (&) into the fabric canopy wallets (Ω) as shown in the diagram below:

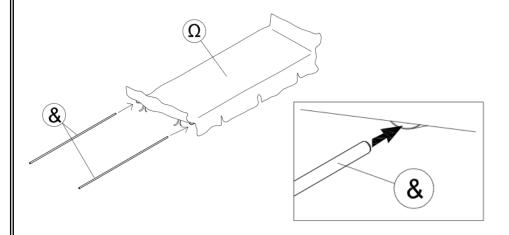


6) Attach both rounded ends of the canopy frame (%) onto the straight canopy bars (&) ensuring that you slot the pole of (%) into the grooves of the plastic fixtures (K) on each side of the canopy frame.

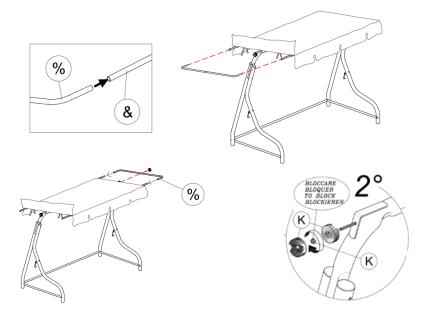


7) Attach the canopy adjustment crank (P) onto the protruding screw using the washer (@) provided as shown in the diagram below:

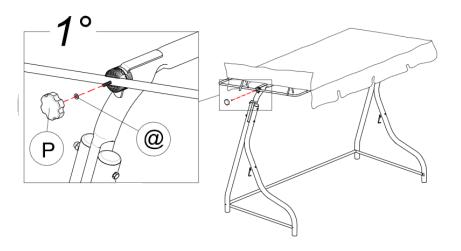


8) Use the Velcro straps to attach the canopy to the side of the frames as shown in the diagram below:






9) Attach each the plastic ends (M) & (L) to the swing seat arm rests (€) on both sides as shown in the diagram below:

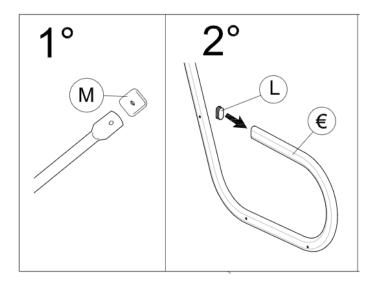

10) Attach each of the arm rests (€) to the seat and back rest frames of the seat (\$) &(#) using the screws advised in the diagram below. Use the springs (O) to attach the swing seat arms to the top of the canopy frame.

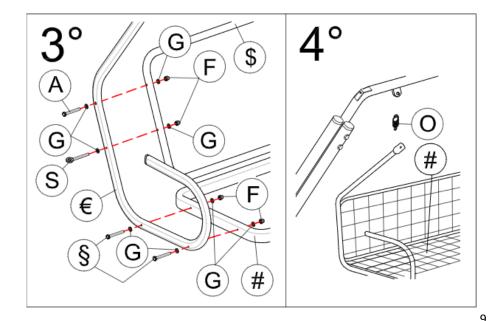

11) Use the 2 x (T) attachments to hook the swing seat arms to the main frame of the body.



Guarantee

Our products are guaranteed for a period of 2 years from the date of purchase. Products that develop a fault within this period are covered by our warranty and we will replace defective parts, or where not available the whole product. The warranty does not apply to any defect in the goods arising from fair wear and tear, wilful damage, accident, negligence by you or any third party, use otherwise than as recommended by us, failure to follow our instructions, any alteration or repair carried out without our approval or has been the subject of commercial use. Your statutory rights remain unaffected, in particular any rights you have under the Consumer Rights Act 2015.

If you have a problem with your product within this warranty period please contact our customer services team.

In the event of changes to the specification of a product and we are not able to replace parts, we will replace the whole product within the 2 year guarantee period

For products that fall outside of the 2 year guarantee, we will endeavor to provide spare parts to purchase for as many of the replaceable parts as possible, but cannot foresee specification changes or upgrades to products or parts outside of the initial 2 year period.

Customer Services:

If you would like further advice or information on your product, ensure you have the SAP code ready and please get in touch with us at Alfresia on the contact options below:

SAP Code: JT04655201 / JT04656901

Phone: 0330 002 1600 (Mon – Fri 9am to 5pm)

Email: support@alfresia.co.uk

Address: Alfresia, Vale Mill (Rochdale) Ltd, Robinson Street, Rochdale, OL16 1TA